

# LED STRIPS

# CATALOGUE


## YEAR 2025



**LIGHTING  
BROTHERS**

[WWW.LIGHTINGBROTHERS.CO.UK](http://WWW.LIGHTINGBROTHERS.CO.UK)

# TABLE OF CONTENTS

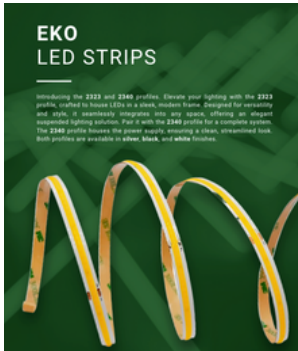

## EKO

PAGE 3-4

The **EKO LED** range is perfect for those seeking energy-efficient lighting at an accessible price point. A reliable choice for accent and ambient lighting in smaller projects.



## STANDARD

PAGE 5-12

The **Standard LED** range offers energy-efficient lighting with full-range dimming. A dependable choice for accent and ambient lighting with excellent colour rendering.



## PREMIUM

PAGE 13-14

Efficient and high-quality **Premium LED** range for long-lasting performance. Engineered for long runs of the brightest LEDs. Best suited for industrial and architectural design applications.

# EKO LED STRIPS


---

Our **EKO LED** strips offer an affordable lighting solution without compromising on versatility or performance. Ideal for a wide range of applications, these strips provide reliable illumination for both residential and commercial spaces. Designed to balance quality and cost, the EKO range is perfect for those seeking energy-efficient lighting at an accessible price point.





# EKO LED STRIP COB

12V



Economic option for a wide range of applications

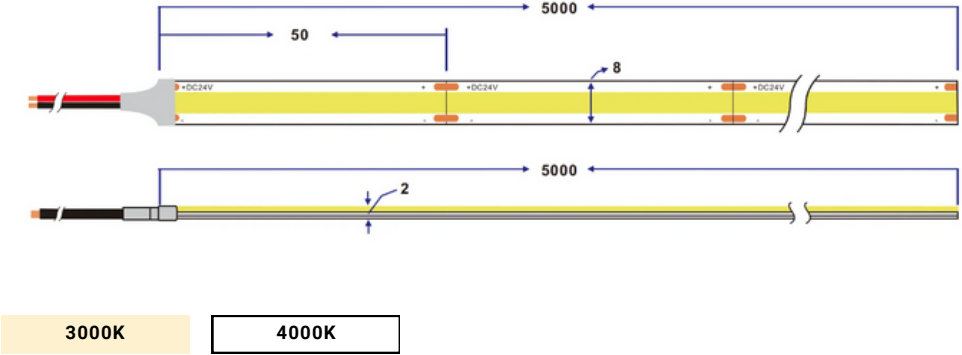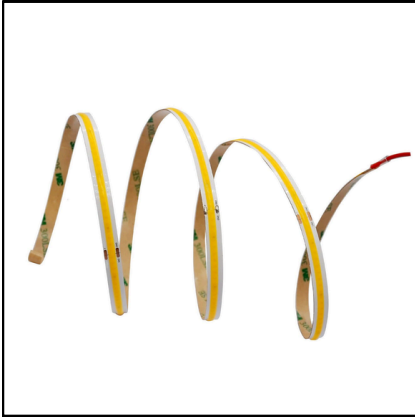

## Product Features

- Brand:** DIO
- Power:** 4.8W/m; 9.6W/m; 14.4W/m;
- Voltage:** 12V
- Amperage:** 0.4A
- Diodes, in 1m:** 480
- Colour temp.:** 3000K; 4000K;
- Luminous flux:** 1000lm/m
- CRI:** >80

- Cutting step:** 50mm
- IP rating:** IP20
- Beam angle:** 120°
- Roll length:** 5m
- Life time, h:** >50000
- Warranty:** 5 years
- Produced in:** EU

## Available Options

SKU	EAN 13	COLOUR TEMPRATURE	POWER	LUMINOUS FLUX
DO-LS-12-10-3K-COB	4779056463621	3000K	10W	1000lm/m
DO-LS-12-10-4K-COB	4779056463591	4000K	10W	1000lm/m

# STANDARD LED STRIPS


---

Full-range dimming and energy-efficient lighting make our standard LED strips perfect for accent and ambient lighting with excellent colour rendering. Available in **12V** and **24V** options, these strips offer a variety of colour temperatures ranging from **2700K** to **6000K**, allowing you to customise the lighting to suit any space. Precision-made in **Lithuania**, they deliver reliable performance and versatile illumination for both domestic and commercial settings.





# STANDARD LED STRIP

## 60 LED/m



Glue in to any of the profiles for superb lighting

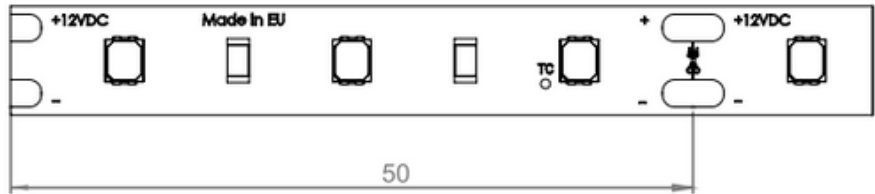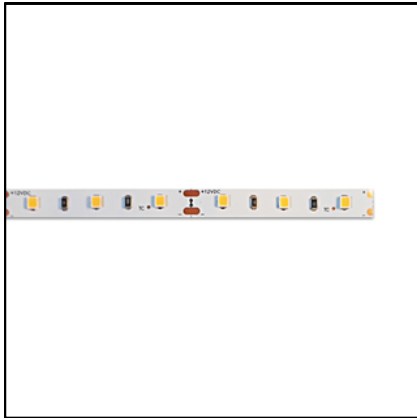

- 2700K
- 3000K
- 4000K
- 6000K

### Product Features

**Brand:** DIO

**Power:** 4,8W/m; 9,6W/m; 14,4W/m;

**Voltage:** 12V

**Amperage:** 0,4A

**Diodes, in 1m:** 480

**Colour temp.:** 2700K; 3000K; 4000K; 6000K;

**Luminous flux:** 531lm/m; 989lm/m; 1389lm/m

**CRI:** >80

**Cutting step:** 50mm

**IP rating:** IP20

**Beam angle:** 120°

**Roll length:** 5m

**Life time, h:** >50000

**Warranty:** 5 years


**Produced in:** EU

### Available Options



SKU	EAN 13	COLOUR TEMPERATURE	POWER	LUMINOUS FLUX
DO-LS-12-48-2K-60	4779056460248	2700K	4.8W	487lm/m
DO-LS-12-48-3K-60	4779056460224	3000K	4.8W	498lm/m
DO-LS-12-48-4K-60	4779056460200	4000K	4.8W	531lm/m
DO-LS-12-48-6K-60	4779056463782	6000K	4.8W	531lm/m
DO-LS-12-48-2K-60	4779056460248	2700K	9.6W	914lm/m
DO-LS-12-48-3K-60	4779056460224	3000K	9.6W	927lm/m
DO-LS-12-48-4K-60	4779056460200	4000K	9.6W	989lm/m
DO-LS-12-48-6K-60	4779056463782	6000K	9.6W	989lm/m
DO-LS-12-48-2K-60	4779056460248	2700K	14.4W	1273lm/m
DO-LS-12-48-3K-60	4779056460224	3000K	14.4W	1302lm/m
DO-LS-12-48-4K-60	4779056460200	4000K	14.4W	1389lm/m
DO-LS-12-48-6K-60	4779056463782	6000K	14.4W	1389lm/m

# STANDARD LED STRIP

# 120 LED/m



Brilliant illumination, ideal for accent or ambient lighting

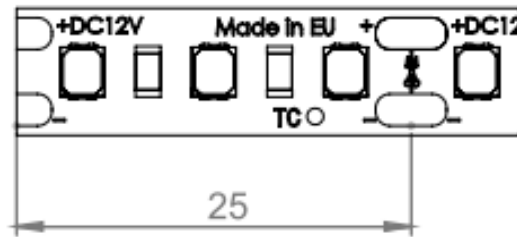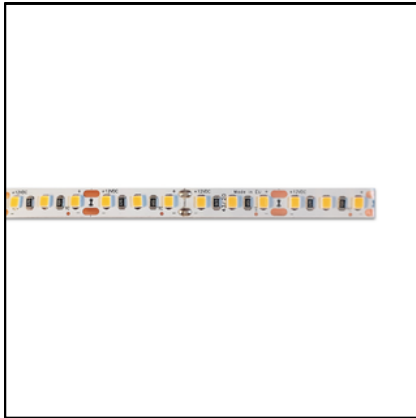

- 2700K
- 3000K
- 4000K
- 6000K

## Product Features

**Brand:** DIO

**Power, W/m:** 4.8; 9.6; 14.4; 18; 25;

**Voltage:** 12V

**Amperage:** 0.4A; 0.8A; 1.2A; 1.5A; 2.08A;

**Diodes, in 1m:** 120

**Colour temp.:** 2700K; 3000K; 4000K; 6000K;

**Luminous flux:** 575lm/m; 1150lm/m; 1725lm/m;  
2156lm/m; 2995lm/m;

**CRI:** >80

**Cutting step:** 25mm

**IP rating:** IP20

**Beam angle:** 120°

**Roll length:** 5m

**Life time, h:** >50000

**Warranty:** 5 years

**Produced in:** EU

## Available Options

SKU	EAN 13	COLOUR TEMPERATURE	POWER	LUMINOUS FLUX
DO-LS-12-48-2K-120	4779056460156	2700K	4.8W	520lm/m
DO-LS-12-48-3K-120	4779056460101	3000K	4.8W	542lm/m
DO-LS-12-48-4K-120	4779056460118	4000K	4.8W	575lm/m
DO-LS-12-48-6K-120	4779056463751	6000K	4.8W	564lm/m
DO-LS-12-96-2K-120	4779056460361	2700K	9.6W	1040lm/m
DO-LS-12-96-3K-120	4779056460347	3000K	9.6W	1084lm/m
DO-LS-12-96-4K-120	4779056460323	4000K	9.6W	1150lm/m
DO-LS-12-96-6K-120	4779056460309	6000K	9.6W	1128lm/m
DO-LS-12-14-2K-120	4779056460583	2700K	14.4W	1560lm/m
DO-LS-12-14-3K-120	4779056460569	3000K	14.4W	1626lm/m
DO-LS-12-14-4K-120	4779056460545	4000K	14.4W	1725lm/m
DO-LS-12-14-6K-120	4779056463843	6000K	14.4W	1692lm/m

# STANDARD LED STRIP

## 120 LED/m


12V





SKU	EAN 13	COLOUR TEMPRATURE	POWER	LUMINOUS FLUX
DO-LS-12-18-2K-120	4779056464130	2700K	18W	1949lm/m
DO-LS-12-18-3K-120	4779056460743	3000K	18W	2032lm/m
DO-LS-12-18-4K-120	4779056460729	4000K	18W	2156lm/m
DO-LS-12-18-6K-120	4779056463508	6000K	18W	2115lm/m
DO-LS-12-25-2K-120	4779056464147	2700K	25W	2708lm/m
DO-LS-12-25-3K-120	4779056460828	3000K	25W	2823lm/m
DO-LS-12-25-4K-120	4779056460811	4000K	25W	2995lm/m
DO-LS-12-25-6K-120	4779056464154	6000K	25W	2938lm/m



# STANDARD LED STRIP 162 LED/m



Powerful and efficient LED strip for accent and ambient lighting

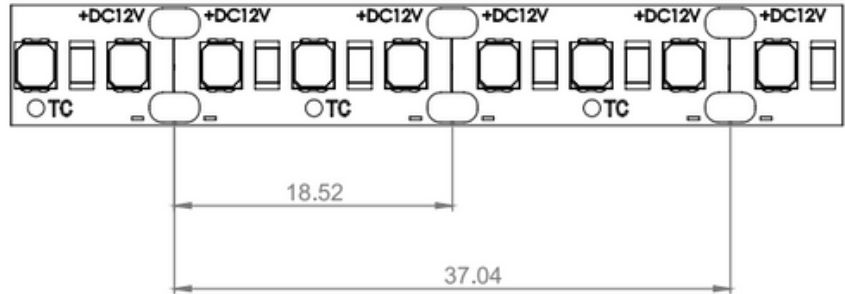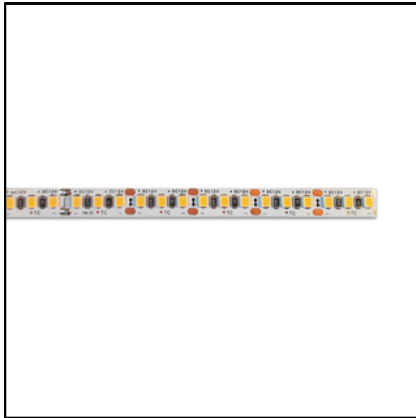

- 2700K
- 3000K
- 4000K
- 6000K

## Product Features

**Brand:** DIO

**Power:** 4.8W/m; 9.6W/m; 14.4W/m;

**Voltage:** 12V

**Amperage:** 0.4A; 0.8A; 1.2A

**Diodes, in 1m:** 162

**Colour temp.:** 2700K; 3000K; 4000K; 6000K;

**Luminous flux:** 533lm/m; 1033lm/m; 1625lm/m;

**CRI:** >80

**Cutting step:** 18.52mm

**IP rating:** IP20

**Beam angle:** 120°

**Roll length:** 5m

**Life time, h:** >50000

**Warranty:** 5 years


**Produced in:** EU

## Available Options



SKU	EAN 13	COLOUR TEMPERATURE	POWER	LUMINOUS FLUX
DO-LS-12-48-2K-162	4779056464161	2700K	4.8W	489lm/m
DO-LS-12-48-3K-162	4779056460187	3000K	4.8W	500lm/m
DO-LS-12-48-4K-162	4779056460163	4000K	4.8W	533lm/m
DO-LS-12-48-6K-162	4779056464178	6000K	4.8W	533lm/m
DO-LS-12-96-2K-162	4779056464185	2700K	9.6W	1010lm/m
DO-LS-12-96-3K-162	4779056460484	3000K	9.6W	1033lm/m
DO-LS-12-96-4K-162	4779056460460	4000K	9.6W	1102lm/m
DO-LS-12-96-6K-162	4779056464192	6000K	9.6W	1102lm/m
DO-LS-12-14-2K-162	4779056464208	2700K	14.4W	1490lm/m
DO-LS-12-14-3K-162	4779056460620	3000K	14.4W	1524lm/m
DO-LS-12-14-4K-162	4779056460606	4000K	14.4W	1625lm/m
DO-LS-12-14-6K-162	4779056464215	6000K	14.4W	1625lm/m

# STANDARD LED STRIP

# 120 LED/m



Brilliant illumination, ideal for accent or ambient lighting

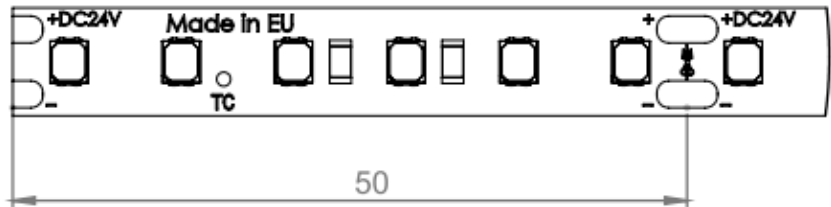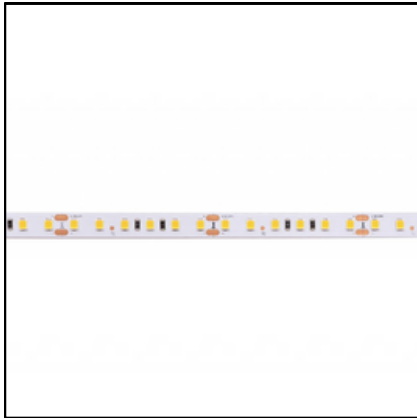

- 2700K
- 3000K
- 4000K
- 6000K

## Product Features

**Brand:** DIO

**Power, W/m:** 4.8; 9.6; 14.4; 18; 25;

**Voltage:** 24V

**Amperage:** 0.2A; 0.4A; 0.6A; 0.74A; 1.04A;

**Diodes, in 1m:** 120

**Colour temp.:** 2700K; 3000K; 4000K; 6000K;

**Luminous flux:** 575lm/m; 1150lm/m; 1725lm/m;  
2156lm/m; 2995lm/m;

**CRI:** >80

**Cutting step:** 50mm

**IP rating:** IP20

**Beam angle:** 120°

**Roll length:** 5m

**Life time, h:** >50000

**Warranty:** 5 years

**Produced in:** EU

## Available Options

SKU	EAN 13	COLOUR TEMPERATURE	POWER	LUMINOUS FLUX
DO-LS-24-48-2K-120	4779056464222	2700K	4.8W	520lm/m
DO-LS-24-48-3K-120	4779056460286	3000K	4.8W	542lm/m
DO-LS-24-48-4K-120	4779056460262	4000K	4.8W	575lm/m
DO-LS-24-48-6K-120	4779056464239	6000K	4.8W	564lm/m
DO-LS-24-96-2K-120	4779056464246	2700K	9.6W	1040lm/m
DO-LS-24-96-3K-120	4779056460521	3000K	9.6W	1084lm/m
DO-LS-24-96-4K-120	4779056460507	4000K	9.6W	1150lm/m
DO-LS-24-96-6K-120	4779056464253	6000K	9.6W	1128lm/m
DO-LS-24-14-2K-120	4779056464260	2700K	14.4W	1560lm/m
DO-LS-24-14-3K-120	4779056460705	3000K	14.4W	1626lm/m
DO-LS-24-14-4K-120	4779056460682	4000K	14.4W	1725lm/m
DO-LS-24-14-6K-120	4779056464277	6000K	14.4W	1692lm/m

# STANDARD LED STRIP

## 120 LED/m


24V





SKU	EAN 13	COLOUR TEMPRATURE	POWER	LUMINOUS FLUX
DO-LS-24-18-2K-120	4779056464284	2700K	18W	1949lm/m
DO-LS-24-18-3K-120	4779056460767	3000K	18W	2032lm/m
DO-LS-24-18-4K-120	4779056460781	4000K	18W	2156lm/m
DO-LS-24-18-6K-120	4779056464291	6000K	18W	2115lm/m
DO-LS-24-25-2K-120	4779056464307	2700K	25W	2708lm/m
DO-LS-24-25-3K-120	4779056460842	3000K	25W	2823lm/m
DO-LS-24-25-4K-120	4779056460866	4000K	25W	2995lm/m
DO-LS-24-25-6K-120	4779056464314	6000K	25W	2938lm/m

# STANDARD LED STRIP Neon Flex 120 LED/m

24V



Continuous line of light replicating the effect of neon lighting

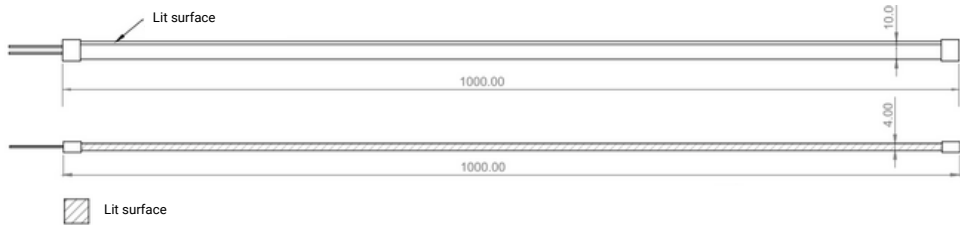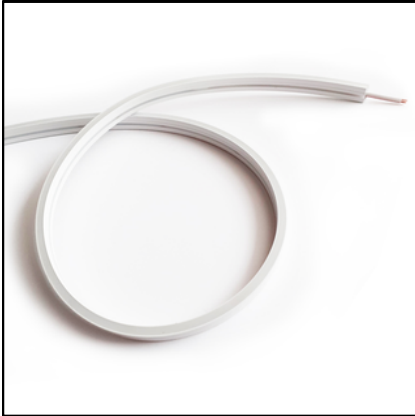

3000K      4000K

## Product Features

**Brand:** DIO

**Power:** 9.6W/m

**Voltage:** 24V

**Amperage:** 0.4A

**Diodes, in 1m:** 120

**Colour temp.:** 3000K; 4000K;

**Luminous flux:** 266lm/m;

**CRI:** >80

**Cutting step:** 50mm

**IP rating:** IP67

**Beam angle:** 120°

**Roll length:** 5m

**Life time, h:** >50000

**Warranty:** 5 years

**Produced in:** EU


## Available Options

SKU	EAN 13	COLOUR TEMPRATURE	POWER	LUMINOUS FLUX
DO-LS-NN-96-3K-120	4779056464383	3000K	9.6W	249lm/m
DO-LS-NN-96-4K-120	4779056464390	4000K	9.6W	266lm/m

# PREMIUM LED STRIPS


---

Our premium LED strip lights deliver exceptional efficiency and quality, designed for long-lasting performance. Featuring Samsung LEDs and a 4oz PCB, they ensure consistent output with minimal voltage drop. With a high CRI and low light temperature distortion, they offer true-to-life colour rendering, ideal for both home and office use. Versatile and easy to install with durable double-sided tape, they are perfect for creating custom lighting fixtures or integrating into furniture. Precision-crafted in Lithuania, these LED strips come with a 7-year warranty, making them a first choice for any lighting project.

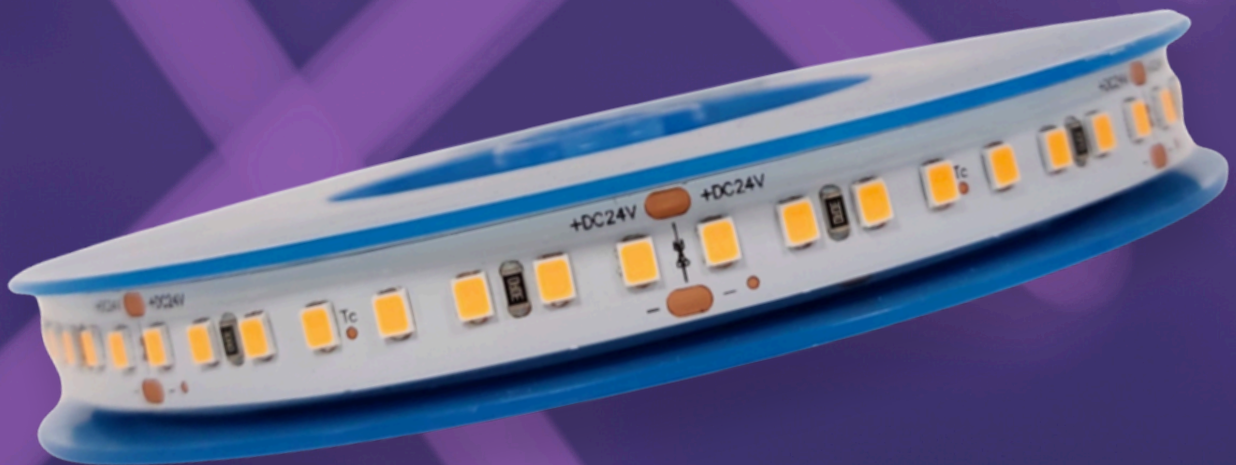


# PREMIUM LED STRIP

# 160 LED/m



Highest-efficiency and quality LEDs which will last a lifetime

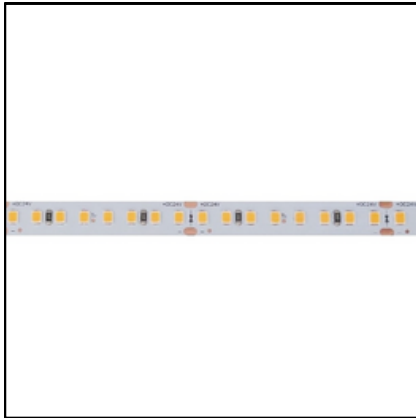

- 2700K
- 3000K
- 4000K
- 6000K

## Product Features

**Brand:** DIO

**Power:** 4.8W/m; 6.5W/m; 14W/m;

**Voltage:** 24V

**Amperage:** 0.2A; 0.27A; 0.58A;

**Diodes, in 1m:** 160

**Colour temp.:** 2700K; 3000K; 4000K; 6000K;

**Luminous flux:** 821lm/m; 1121lm/m; 2380lm/m;

**CRI:** >80

**Cutting step:** 50mm

**IP rating:** IP20

**Beam angle:** 120°

**Roll length:** 30m

**Life time, h:** >70 000

**Warranty:** 7 years

**Produced in:** EU

## Available Options

SKU	EAN 13	COLOUR TEMPERATURE	POWER	LUMINOUS FLUX
DO-LS-24-48-2K-160	4779056464321	2700K	4.8W	763lm/m
DO-LS-24-48-3K-160	4779056460965	3000K	4.8W	782lm/m
DO-LS-24-48-4K-160	4779056460941	4000K	4.8W	821lm/m
DO-LS-24-48-6K-160	4779056464338	6000K	4.8W	821lm/m
DO-LS-24-65-2K-160	4779056464345	2700K	6.5W	1047lm/m
DO-LS-24-65-3K-160	4779056461009	3000K	6.5W	1070lm/m
DO-LS-24-65-4K-160	4779056460989	4000K	6.5W	1121lm/m
DO-LS-24-65-6K-160	4779056464352	6000K	6.5W	1121lm/m
DO-LS-24-14-2K-160	4779056464369	2700K	14W	2255lm/m
DO-LS-24-14-3K-160	4779056461047	3000K	14W	2318lm/m
DO-LS-24-14-4K-160	4779056461023	4000K	14W	2380lm/m
DO-LS-24-14-6K-160	4779056464376	6000K	14W	2380lm/m